



SV AIRFLOWTM

2D / 3D Airflow Modeling Software

Verification Manual

Written by:
Robert Thode, B.Sc.G.E.

Edited by:
Murray Fredlund, Ph.D.

SoilVision Systems Ltd.
Saskatoon, Saskatchewan, Canada

Software License

The software described in this manual is furnished under a license agreement. The software may be used or copied only in accordance with the terms of the agreement.

Software Support

Support for the software is furnished under the terms of a support agreement.

Copyright

Information contained within this Verification Manual is copyrighted and all rights are reserved by SoilVision Systems Ltd. The SVAIRFLOW software is a proprietary product and trade secret of SoilVision Systems. The Verification Manual may be reproduced or copied in whole or in part by the software licensee for use with running the software. The Verification Manual may not be reproduced or copied in any form or by any means for the purpose of selling the copies.

Disclaimer of Warranty

SoilVision Systems Ltd. reserves the right to make periodic modifications of this product without obligation to notify any person of such revision. SoilVision does not guarantee, warrant, or make any representation regarding the use of, or the results of, the programs in terms of correctness, accuracy, reliability, currentness, or otherwise; the user is expected to make the final evaluation in the context of his (her) own problems.

Trademarks

Windows™ is a registered trademark of Microsoft Corporation.
SoilVision® is a registered trademark of SoilVision Systems Ltd.
SVOFFICE™ is a trademark of SoilVision Systems, Ltd.
CHEMFLUX™ is a trademark of SoilVision Systems Ltd.
SVFLUX™ is a trademark of SoilVision Systems Ltd.
SVHEAT™ is a trademark of SoilVision Systems Ltd.
SVAIRFLOW™ is a trademark of SoilVision Systems Ltd.
SVSOLID™ is a trademark of SoilVision Systems Ltd.
SVDYNAMIC™ is a trademark of SoilVision Systems Ltd.
ACUMESH™ is a trademark of SoilVision Systems Ltd.
FlexPDE® is a registered trademark of PDE Solutions Inc.

Copyright © 2008
by
SoilVision Systems Ltd.
Saskatoon, Saskatchewan, Canada
ALL RIGHTS RESERVED
Printed in Canada

1 INTRODUCTION.....4

2 TWO-DIMENSIONAL STEADY-STATE AIR-FLOW5

 2.1 BAEHR & HULT (1991).....5

 2.1.1 Model Description5

 2.1.2 Results and Discussions6

3 REFERENCES.....8

1 INTRODUCTION

The word "Verification", when used in connection with computer software can be defined as "the ability of the computer code to provide a solution consistent with the physics defined by the governing partial differential equation, PDE". There are also other factors such as initial conditions, boundary conditions, and control variables that also affect the accuracy of the code to perform as stated.

"Verification" is generally achieved by solving a series of so-called "benchmark" problems. "Benchmark" problems are problems for which there is a closed-form solution or for which the solution has become "reasonably certain" as a result of long-hand calculations that have been performed. Publication of the "benchmark" solutions in research journals or textbooks also lends credibility to the solution. There are also example problems that have been solved and published in User Manual documentation associated with other comparable software packages. While these are valuable checks to perform, it must be realized that it is possible that errors can be transferred from one's software solution to another. Consequently, care must be taken in performing the "verification" process on a particular software package. It must also be remembered there is never such a thing as complete software verification for "all" possible problems. Rather, it is an ongoing process that establishes credibility with time.

SoilVision Systems takes the process of "verification" most seriously and has undertaken a wide range of steps to ensure that the SVAIRFLOW software will perform as intended according to the theory of saturated-unsaturated air flow.

The following models represent comparisons made to textbook solutions, hand calculations, and other software packages. We at SoilVision Systems Ltd. are dedicated to providing our clients with reliable and tested software. While the following list of example models is comprehensive, it does not reflect the entirety of models, which may be posed to the SVAIRFLOW software. It is our recommendation that water balance checking be performed on all model runs prior to presentation of results. It is also our recommendation that the modeling process move from simple to complex models with simpler models being verified through the use of hand calculations or simple spreadsheet calculations.

2 TWO-DIMENSIONAL STEADY-STATE AIR-FLOW

The steady-state model is used to compare SVAIRFLOW results to those recorded in a study by Baehr & Hult (1991).

2.1 BAEHR & HULT (1991)

Baehr & Hult (1991), present two analytical solutions for steady-state axisymmetric airflow to a single well that is partially screened in the unsaturated zone. Input data was collected from a series of pneumatic tests. One model considers a stratum of relatively low air conductivity, separating the stratum in which the well is completed from the atmosphere. In the other scenario there is no separating stratum between the material layer and the atmosphere. This second analytical model with no separated stratum as presented by Baehr & Hult has been created in SVAIRFLOW and is presented below.

Project: BoreHolePumping
Model: BHuzPeq

In this scenario, a single material layer is present and is exposed to the atmosphere. A well has been drilled to a depth of 2.88m and a horizontal water table existed at a depth of 3.37m.

Axisymmetric Model Geometry:

Well depth	= 2.88m
Well screen height	= 0.6m
Well radius	= 0.115m
Model radius	= 20m
Model depth	= 3.37m

Boundary Conditions:

Ground Surface	= Pressure of 101.458 kPa (atmospheric)
Well screen side and base	= Normal Flux Expression of 0.13785 m/s
Model base	= Zero Flux (water table)
Wellbore	= Zero Flux
Model side	= Zero Flux

Material Properties:

Intrinsic Permeability	= 1.4E-10 m ²
Vertical anisotropy ratio	= 0.3142

An initial air pressure of 101.458 kPa is applied to entire material.

2.1.1 Model Description

In this scenario, a single material layer is present and is exposed to the atmosphere. A well has been drilled to a depth of 2.88m and a horizontal water table existed at a depth of 3.37m.

Axisymmetric Model Geometry:

Well depth	= 2.88m
Well screen height	= 0.6m
Well radius	= 0.115m
Model radius	= 20m
Model depth	= 3.37m

Boundary Conditions:

Ground Surface	= Pressure of 101.458 kPa (atmospheric)
Well screen side	= Normal Flux Expression of 0.13785 m/s
Model base	= Zero Flux (water table)

Wellbore = Zero Flux
 Model side = Zero Flux

Material Properties:

Intrinsic Permeability = 1.4E-10 m²
 Vertical anisotropy ratio = 0.3142

An initial air pressure of 101.458 kPa is applied to entire material.

2.1.2 Results and Discussions

Figure 1 through Figure 4 show the normalized air pressure versus the radial distance from the pumping well at various depths. The square symbols represent the values obtained from the field tests. The dashed line indicates the analytical results. The results of the SVAIRFLOW analysis are presented as the solid line and are in good agreement with both the analytical and field results.

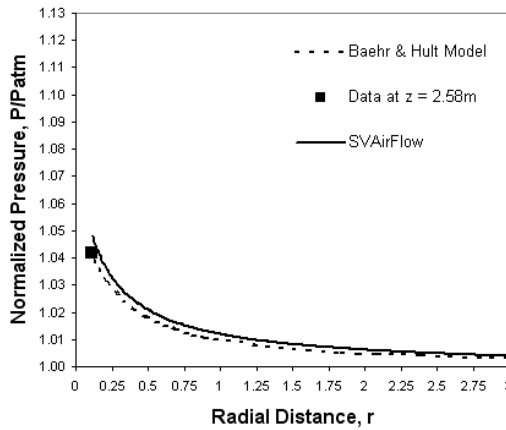


Figure 1 Normalized pressure as a function of cylindrical coordinates (r, z) in the upper unsaturated zone for $z = 2.58\text{m}$

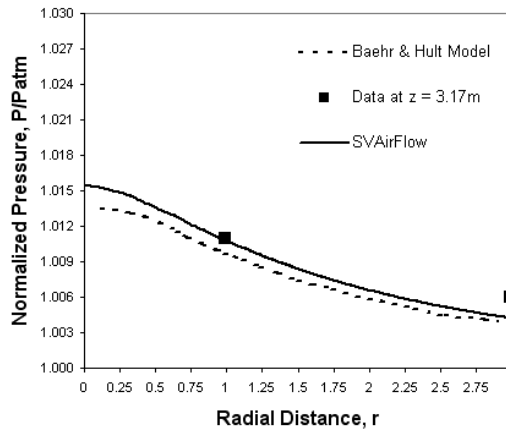


Figure 2 Normalized pressure as a function of cylindrical coordinates (r, z) in the upper unsaturated zone for $z = 3.17\text{m}$

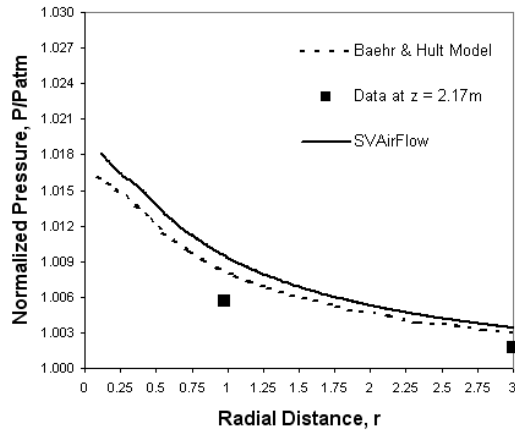


Figure 3 Normalized pressure as a function of cylindrical coordinates (r,z) in the upper unsaturated zone for $z = 2.17\text{m}$

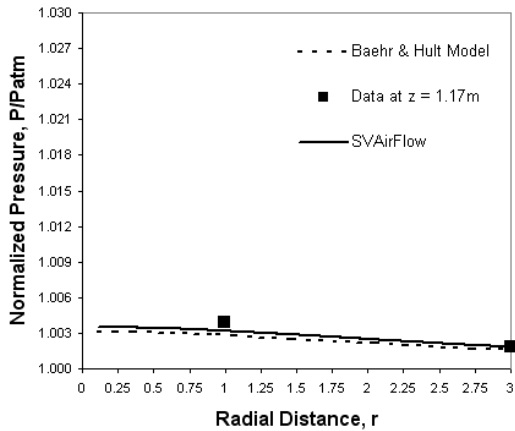


Figure 4 Normalized pressure as a function of cylindrical coordinates (r,z) in the upper unsaturated zone for $z = 1.17\text{m}$

3 REFERENCES

- Baehr, A.E., and Hult, M.F. 1991. Evaluation of Unsaturated Zone Air Permeability Through Pneumatic Tests. *Water Resources Research*, 27(10): 2605-2617.
- Ba-Te (2004). "Flow of Air-phase in Soils and Its Application in Emergent Stabilization of Soil Slopes," Hong Kong University of Science and Technology, Hong Kong.
- Fredlund, D.G., and Rahardjo, H. 1993. *Soil Mechanics for Unsaturated Soils*. John Wiley & Sons, New York
- FlexPDE 3.x Reference Manual, 1999. PDE Solutions Inc. Antioch, CA 94509
- FlexPDE 4.x Reference Manual, 2004. PDE Solutions Inc. Antioch, CA 94509

This page has been left blank intentionally.